

MERYwall is a modern premium headwall where high aesthetics meets with full medical functionality. Available with an elegant Corian® or fire-resistant **HPL front** panels, it provides comprehensive integration of medical systems to create a consistent and welcoming space for patients and medical staff.



TECHNICAL SPECIFICATION

- Aluminium frame mounted directly on the wall
- Decorative front panel made of HPL fire resistant laminated panels
- Three independent ducts for medical gases, electricity and IT sockets
- Lamp made of brushed aluminium

Size:

- Length (standard): single unit – 1600 mm
- Height: 1700 mm
- Depth: 75 mm (165 mm with lamp)

MEDICAL GAS OUTLETS AND VACUUM

- Available standards: SS / DIN / BS / AFNOR / other
- Medical gases location on the BHU: at the door side

LIGHTING

- Lighting types: LED / T5
- Lighting configuration: general/room, reading, night
- LED Ambient Light
- Lighting is switched on/off by switch/button on the BHU and/or the wall and/or patient's handset

CHARACTERISTICS

- Lamp made of brushed aluminium

STANDARD CONFIGURATION IN HOSPITAL WARDS


- Medical gas outlets: 1x O2, 1x VAC
- 230 V electrical sockets: 3 pcs (2 circuits)
- Equipotential pins: 1 pc
- IT sockets RJ-45, cat. 6: 1 pc
- General lighting 1x 48W LED, 8800 lm: switch on the unit
- Reading lighting 1x 24W LED, 4400 lm: switch on the unit
- LED Ambient lighting 2x 12W LED, 2x 2200 lm: switch on the unit
- Night lighting 1x 6W LED, 1100 lm: switch on the unit
- NCS cut-out

ELECTRICAL AND IT SOCKETS

- Electrical sockets: Type E (FR) / Type F (Schuko) / Type G (BS) / other
- IT sockets: RJ-11 / RJ-12 / RJ-45, 6a cat.or higher
- Multimedia sockets: USB, HDMI, other
- NCS depending on customers' demand

VERSION A

E – Electrical system inlet
G – Gas system inlet

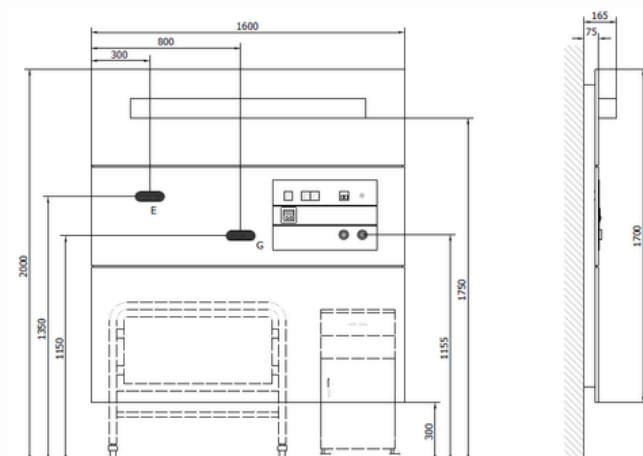

VERSION B (mirror reflection)

